



Cutting tools for stationary applications



Cutting tools for stationary applications

Table of contents



Cutting tools for stationary applications

■ General information	3
■ Material suitability overview	4
■ Explanation of pictograms used	5
■ Formulae for cut data calculation	5
■ Explanation of item designation	6



Universal solid tungsten carbide end mills


■ Universal end mill with two blades UC2	9
■ Universal end mill with three blades UC3	12
■ Universal end mill with four blades UC4	15
■ Universal end mill with six/eight blades UC6/8	18
■ Universal deburring end mill UD	20
■ Universal full radius end mill UB	23



Cutting tools for stationary applications from PFERD

PFERD supplies cutting tools for all of the most common stationary applications.

PFERD solid carbide mills are suitable for a wide range of milling operations on lathes and milling machines, and in automated centres. The tools' optimum stock removal rate ensures high productivity.

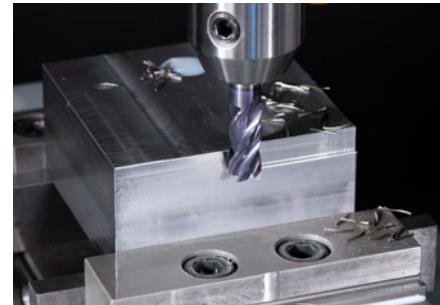

Technical customer support

If you have any questions about optimizing your stock removal applications, our sales representatives and technical advisers will be happy to help or visit you. PFERD works alongside you to provide application engineering solutions for working with diverse materials.



Please do not hesitate to contact us for further information. You can find our worldwide sales office addresses at: www.pferd.com.

PFERD quality

PFERD solid carbide mills are made from tungsten carbide optimized for specific applications and with very low manufacturing tolerances, and achieve the very highest quality standards. The quality of PFERD tools has been certified according to ISO 9001.



Custom-made products

If you cannot find the solution for your particular application in our catalogue range, we are happy to produce milling tools to meet your wishes and requirements. Our sales representatives and technical advisers will be happy to assist you in analyzing your task.

Find your ideal tool solution in just three steps:

■ 1. Process analysis

Make an appointment with our experienced sales representatives and technical advisers. You can find our worldwide sales office addresses at www.pferd.com.

■ 2. Production

Our production teams subsequently create a technical drawing with which your made-to-order product will be produced.

■ 3. Use

See the quality, performance and economic value of PFERD tools for yourself!

Resharpening

All PFERD cutting tools for stationary applications can be reground. Please contact us for further information.



Cutting tools for stationary applications

Material suitability overview



Material group			Universal full radius end mill UB	Universal deburring end mill UD	Universal end mill with two blades UC2	Universal end mill with three blades UC3	Universal end mill with four blades UC4	Universal end mill with six/eight blades UC6/8
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	●	●	●	●	●	●
M	Stainless steel	Ferritic and martensitic	●	●	●	●	○	●
		Austenitic	●	●	●	●	○	●
		High-temperature-resistant and ferritic-austenitic (duplex)	○	●	○	○	○	○
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	●	●	●	●	●	●
		Cast iron with nodular graphite (GJS, GGG)	●	●	●	●	●	●
N	Non-ferrous metals	Aluminium	○	●	○	○	○	○
		Copper, brass, bronze, red brass	●	●	○	○	○	○
S	Super and titanium alloys	Heat-resistant super alloys based on Fe, Ni and Co		○		○	○	●
		Pure titanium		○		○	○	●
		Titanium alloys		○		○	○	●
H	Hard steels and chilled castings	Heat-treated and hardened steels up to 50 HRC	●	○	○	○	○	○
		Hardened steels up to 58 HRC	○					
		Hardened steels over 58 HRC						
O	Other	Thermoplastics	○	○	○	○	○	○
		Duroplastics						
		GRP/CRP reinforced plastics, graphite						

● = highly suitable ○ = suitable



Geometry – Type


45° corner chamfer



Sharp




Radius



60° conical shape



90° conical shape



Full radius

Geometry – Number of blades


Number of blades

Geometry – Torsion


Torsion angle

Norm


Company standard



DIN 6527L

Shank type


Smooth cylindrical shank HA in accordance with DIN 6535



Weldon shank HB in accordance with DIN 6535 with lateral driving surface

Feed direction


Feed xy



Feed xy(z)



Feed xyz

Unequal pitch


Unequal cutting pitch

Applications


Side milling



Slot cutting



Ramping



Drilling



Chamfering/deburring



Profile milling



Profile milling – use of shoulder



Profile milling – use of tip

Formulae for cut data calculation

$$n = \frac{V_c \times 1.000}{DC \times \pi} \text{ min}^{-1}$$

Rotational speed

$$V_c = \frac{DC \times \pi \times n}{1.000} \text{ m/min}$$

Cutting speed

$$V_f = f_z \times ZEFP \times n \text{ mm/min}$$

Feeding speed
Explanation of the abbreviations

- a_p = cutting depth
- a_c = contact width
- DC = milling cutter diameter in [mm]

- f_z = Feed per tooth in [mm/tooth]
- n = spindle rotational speed in [rev/min]
- V_c = Cutting speed in [m/min]

- V_f = Feeding speed in [mm/min]
- ZEFP = Effective no. of teeth

Cutting tools for stationary applications

Explanation of item designation



S C M - U C 4 - M 1 0 0 C - M 7 2 H B A L 4 0

① Tool group

SCM = Solid carbide mill

② Product line

U = Universal Line

③ Shape

B = Full radius end mill (ball nose)

D = Deburring end mill (deburring/
chamfering)

C = Cylindrical end mill with centre cut

④ Number of cutting edges

⑤ Material group

ISO groups P, M, K, N, S, H.

Blank, unless specified.

⑥ Units

M = Metric

⑦ Cutting diameter

Metric: mm x 10

Example: D 10.5 mm = 105

⑧ Corner design

A = Angled

Example: A90°

C = Chamfer

R = radius with size

Example: R40 for 4.0 mm

S = Sharp

⑨ Cut length class

XS: APMX 3 x DC

S: APMX 1-2 x DC

M: APMX 2-2.5 x DC

L: APMX 2.5-3 x DC

XL: APMX >3 x DC

⑩ Total length

Metric: total length LF in mm.

Not specified for deburring end mills.

⑪ Shank type

HA = Cylindrical

HB = Weldon shank (in accordance with DIN
6535)

Additional shank diameter for design with
DC < 6 mm and DCON = 6 mm

⑫ *

⑬ *

⑭ Blade material

*Optional

Explanation of short names in accordance with ISO 13399

APMX = Maximum cutting depth

CHW = Chamfer width

DC = Cutting diameter

DCON = Shank diameter

DN = Neck diameter


KAPR = Tool cutting edge angle

LF = Total length

LU = Working length

RE = Corner radius

ZEFP = No. of teeth

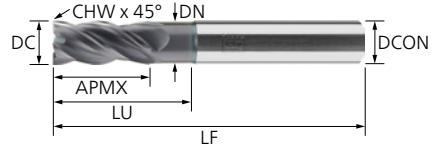

Recommended cutting speeds [m/min]

Material group			Specification/ example material	Suitability	Full slot milling $a_p = 1 \times DC$; $a_e = 1 \times DC$								
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]							
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	90	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
			500 to 700 N/mm ²	●	85	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
			700 to 1,000 N/mm ²	●	80	0.02	0.02	0.02	0.03	0.04	0.045	0.055	0.07
			1,000 to 1,400 N/mm ²	●	70	0.02	0.02	0.02	0.03	0.04	0.045	0.055	0.07
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	55	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Austenitic	e.g. 1.4301, 1.4571	●	55	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		High-temperature- resistant and ferritic- austenitic (duplex)	e.g. 1.4362, 1.4462	○	45	0.018	0.018	0.02	0.025	0.03	0.04	0.05	0.065
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	80	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	65	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	135	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
			Al > 10% Si	○	110	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Copper, brass, bronze and red brass		○	90	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co										
		Pure titanium											
		Titanium alloys											
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	60	0.02	0.02	0.02	0.03	0.04	0.055	0.06	0.07
			up to 58 HRC										
			> 58 HRC										
O	Other	Thermoplastics		○	90	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Duroplastics											
		GRP/CRP reinforced plastics, graphite											

● = highly suitable ○ = suitable

Cutting tools for stationary applications

Universal end mill with two blades UC2

PFERD



Recommended cutting speeds [m/min]


Material group			Specification/ example material	Suitability	Side milling $a_p = 1 \times DC$; $a_e = 0.1 \times DC$								
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]							
						4	5	6	8	10	12	16	20
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	210	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
			500 to 700 N/mm ²	●	190	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
			700 to 1,000 N/mm ²	●	170	0.025	0.025	0.035	0.045	0.06	0.07	0.08	0.1
			1,000 to 1,400 N/mm ²	●	150	0.025	0.025	0.035	0.045	0.06	0.07	0.08	0.1
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	120	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Austenitic	e.g. 1.4301, 1.4571	●	120	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	90	0.025	0.025	0.033	0.038	0.045	0.06	0.08	0.1
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	180	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	140	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	250	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
			Al > 10% Si	○	200	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Copper, brass, bronze and red brass		○	200	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co										
		Pure titanium											
		Titanium alloys											
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	75	0.025	0.025	0.035	0.045	0.06	0.07	0.08	0.1
			up to 58 HRC										
			> 58 HRC										
O	Other	Thermoplastics		○	200	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Duroplastics											
		GRP/CRP reinforced plastics, graphite											

● = highly suitable ○ = suitable



Sharp corner design

End mills for full slot milling, drill slot milling and for roughing with high contact widths. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.

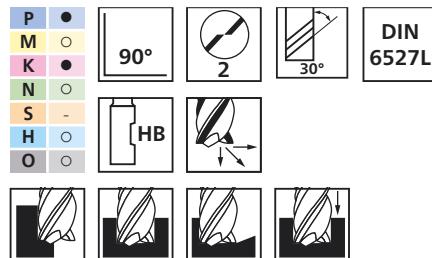

Special features:

- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.
- Good chip removal due to very large chip space.

DC [mm]	DCON [mm]	APMX [mm]	LF [mm]	ZEFP		Item no.	Designation	Price/unit EUR
Long HB								
4	6	8	57		2	1	23000124	SCM-UC2-M040S-S57HB6 AL40
5	6	10	57		2	1	23000125	SCM-UC2-M050S-S57HB6 AL40
6	6	10	57		2	1	23000126	SCM-UC2-M060S-S57HB AL40
8	8	16	63		2	1	23000127	SCM-UC2-M080S-S63HB AL40
10	10	19	72		2	1	23000128	SCM-UC2-M100S-S72HB AL40
12	12	22	83		2	1	23000129	SCM-UC2-M120S-S83HB AL40
16	16	26	92		2	1	23000130	SCM-UC2-M160S-S92HB AL40



Cutting tools for stationary applications

Universal end mill with three blades UC3



Recommended cutting speeds [m/min]

Material group			Specification/ example material	Suitability	Full slot milling $a_p = 1 \times DC; a_e = 1 \times DC$									
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]								
						3	4	5	6	8	10	12	16	20
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	130	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
			500 to 700 N/mm ²	●	120	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
			700 to 1,000 N/mm ²	●	100	0.01	0.016	0.02	0.02	0.03	0.045	0.045	0.06	0.07
			1,000 to 1,400 N/mm ²	●	80	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	45	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Austenitic	e.g. 1.4301, 1.4571	●	50	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	40	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	130	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	100	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	200	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
			Al > 10% Si	○	180	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Copper, brass, bronze and red brass		○	200	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	○	35	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Pure titanium		○	100	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Titanium alloys		○	50	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	60	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
			up to 58 HRC											
			> 58 HRC											
O	Other	Thermoplastics		○	110	0.025	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Duroplastics												
		GRP/CRP reinforced plastics, graphite												

● = highly suitable ○ = suitable

Recommended cutting speeds [m/min]


Material group			Specification/ example material	Suitability	Side milling $a_p = 1 \times DC; a_e = 0.4 \times DC$									
					Cutting speed v_c [m/min]		Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]							
					3	4	5	6	8	10	12	16	20	
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	180	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
			500 to 700 N/mm ²	●	160	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
			700 to 1,000 N/mm ²	●	150	0.01	0.016	0.025	0.025	0.035	0.055	0.055	0.07	0.085
			1,000 to 1,400 N/mm ²	●	110	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	70	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Austenitic	e.g. 1.4301, 1.4571	●	75	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	60	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	180	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	140	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	250	0.04	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
			Al > 10% Si	○	200	0.04	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Copper, brass, bronze and red brass		○	200	0.04	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	○	45	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Pure titanium		○	110	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Titanium alloys		○	60	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	75	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
			up to 58 HRC											
			> 58 HRC											
O	Other	Thermoplastics		○	200	0.04	0.05	0.05	0.065	0.075	0.09	0.12	0.16	0.2
		Duroplastics												
		GRP/CRP reinforced plastics, graphite												

● = highly suitable ○ = suitable

Universal solid tungsten carbide end mills


Universal end mill with three blades UC3

PFERD

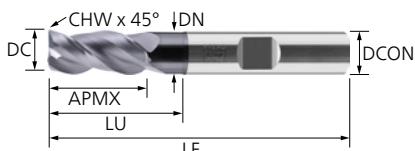

Chamfer corner design

End mills for full slot milling, drill slot milling and for a wide range of roughing tasks. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.

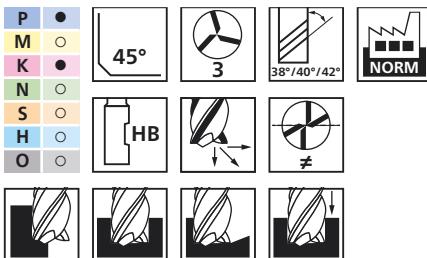

Special features:

- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.
- Design with neck chip channel.

DC [mm]	DCON [mm]	DN [mm]	APMX [mm]	LF [mm]	LU [mm]	CHW [mm]	ZEFP	Item no.	Designation	Price/ unit EUR
Long HB										
3	6	2.8	8	57	11	0.1	3	1	23000131	SCM-UC3-M030C-M57HB6 AL40
4	6	3.7	11	57	16	0.1	3	1	23000132	SCM-UC3-M040C-M57HB6 AL40
5	6	4.7	13	57	18	0.15	3	1	23000133	SCM-UC3-M050C-M57HB6 AL40
6	6	5.6	13	57	18	0.2	3	1	23000134	SCM-UC3-M060C-M57HB AL40
8	8	7.5	19	63	26	0.2	3	1	23000135	SCM-UC3-M080C-M63HB AL40
10	10	9.5	22	72	32	0.2	3	1	23000136	SCM-UC3-M100C-M72HB AL40
12	12	11	26	83	36	0.3	3	1	23000137	SCM-UC3-M120C-M83HB AL40
16	16	15	32	92	42	0.3	3	1	23000138	SCM-UC3-M160C-M92HB AL40

Recommended cutting speeds [m/min]

Material group			Specification/ example material	Suitability	Full slot milling $a_p = 1 \times DC; a_e = 1 \times DC$									
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]								
						3	4	5	6	8	10	12	16	20
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	135	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
			500 to 700 N/mm ²	●	130	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
			700 to 1,000 N/mm ²	●	110	0.01	0.016	0.02	0.02	0.03	0.045	0.045	0.06	0.07
			1,000 to 1,400 N/mm ²	●	80	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	○	70	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Austenitic	e.g. 1.4301, 1.4571	○	60	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	50	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	130	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	100	0.01	0.016	0.03	0.03	0.04	0.06	0.06	0.085	0.1
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	200	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11
			Al > 10% Si	○	180	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11
		Copper, brass, bronze and red brass		○	200	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	○	35	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Pure titanium		○	100	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
		Titanium alloys		○	50	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	60	0.01	0.012	0.02	0.02	0.03	0.045	0.045	0.06	0.07
			up to 58 HRC											
			> 58 HRC											
O	Other	Thermoplastics		○	180	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.1	0.11
		Duroplastics												
		GRP/CRP reinforced plastics, graphite												

● = highly suitable ○ = suitable

Cutting tools for stationary applications

Universal end mill with four blades UC4


PFERD



Recommended cutting speeds [m/min]


Material group			Specification/ example material	Suitability	Side milling $a_p = 2 \times DC$; $a_e = 0.4 \times DC$									
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]								
						3	4	5	6	8	10	12	16	20
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	180	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
			500 to 700 N/mm ²	●	160	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
			700 to 1,000 N/mm ²	●	150	0.01	0.016	0.025	0.025	0.035	0.055	0.055	0.07	0.085
			1,000 to 1,400 N/mm ²	●	110	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	○	85	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Austenitic	e.g. 1.4301, 1.4571	○	75	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	65	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	180	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	140	0.01	0.016	0.035	0.035	0.045	0.075	0.075	0.1	0.12
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	230	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
			Al > 10% Si	○	210	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
		Copper, brass, bronze and red brass		○	230	0.03	0.035	0.035	0.04	0.05	0.06	0.08	0.1	0.13
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	○	45	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Pure titanium		○	120	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
		Titanium alloys		○	70	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	75	0.01	0.012	0.025	0.025	0.035	0.055	0.055	0.07	0.085
			up to 58 HRC											
			> 58 HRC											
O	Other	Thermoplastics		○	210	0.04	0.04	0.06	0.06	0.07	0.07	0.085	0.1	0.12
		Duroplastics												
		GRP/CRP reinforced plastics, graphite												

● = highly suitable ○ = suitable

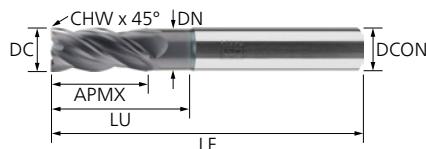

Chamfer corner design

End mills for various applications, from roughing through to finishing and ramping. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.

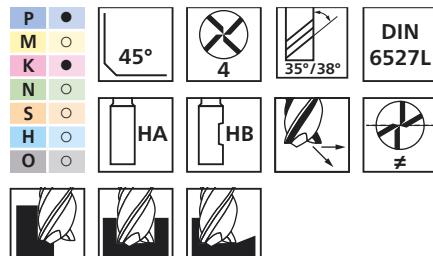

Special features:


- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.
- Design with neck chip channel.

DC [mm]	DCON [mm]	DN [mm]	APMX [mm]	LF [mm]	LU [mm]	CHW [mm]	ZEFP	Item no.	Designation	Price/ unit EUR
Long HA HA										
3	6	2.8	8	57	18	0.13	4	1	23000148	SCM-UC4-M030C-M57HA6 AL40
4	6	3.6	11	57	21	0.13	4	1	23000149	SCM-UC4-M040C-M57HA6 AL40
5	6	4.6	13	57	21	0.2	4	1	23000150	SCM-UC4-M050C-M57HA6 AL40
6	6	5.5	13	57	21	0.2	4	1	23000151	SCM-UC4-M060C-M57HA AL40
8	8	7.5	19	63	27	0.2	4	1	23000152	SCM-UC4-M080C-M63HA AL40
10	10	9.5	22	72	32	0.2	4	1	23000153	SCM-UC4-M100C-M72HA AL40
12	12	11.5	26	83	38	0.3	4	1	23000154	SCM-UC4-M120C-M83HA AL40
16	16	15.5	32	92	44	0.3	4	1	23000155	SCM-UC4-M160C-M92HA AL40
20	20	19.5	38	104	54	0.4	4	1	23000156	SCM-UC4-M200C-M104HA AL40
Long HB HB										
3	6	2.8	8	57	18	0.13	4	1	23000139	SCM-UC4-M030C-M57HB6 AL40
4	6	3.6	11	57	21	0.13	4	1	23000140	SCM-UC4-M040C-M57HB6 AL40
5	6	4.6	13	57	21	0.2	4	1	23000141	SCM-UC4-M050C-M57HB6 AL40
6	6	5.5	13	57	21	0.2	4	1	23000142	SCM-UC4-M060C-M57HB AL40
8	8	7.5	19	63	27	0.2	4	1	23000143	SCM-UC4-M080C-M63HB AL40
10	10	9.5	22	72	32	0.2	4	1	23000144	SCM-UC4-M100C-M72HB AL40
12	12	11.5	26	83	38	0.3	4	1	23000145	SCM-UC4-M120C-M83HB AL40
16	16	15.5	32	92	44	0.3	4	1	23000146	SCM-UC4-M160C-M92HB AL40
20	20	19.5	38	104	54	0.4	4	1	23000147	SCM-UC4-M200C-M104HB AL40




Universal solid tungsten carbide end mills

Universal end mill with four blades UC4

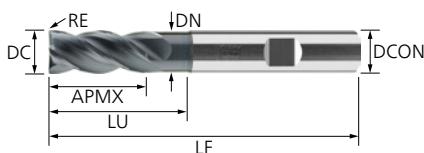

Radius corner design

End mills for various applications, from roughing through to finishing. The radius design is also suitable for free-form profile cutting. The solid tungsten carbide end mills can be used universally on a large number of materials.

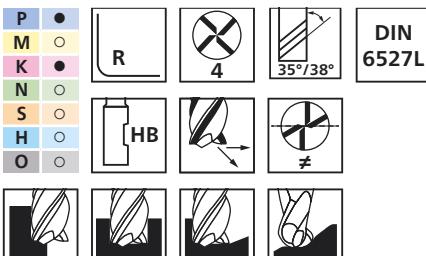

Special features:

- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.
- Design with neck chip channel.

DC [mm]	DCON [mm]	DN [mm]	APMX [mm]	LF [mm]	LU [mm]	RE [mm]	ZEFP		Item no.	Designation	Price/ unit EUR
Long HB											
8	8	7.5	19	63	27	0.5	4	1	23000157	SCM-UC4-M080R05-M63HB AL40	-
						1	4	1	23000158	SCM-UC4-M080R10-M63HB AL40	-
						1.5	4	1	23000159	SCM-UC4-M080R15-M63HB AL40	-
						2	4	1	23000160	SCM-UC4-M080R20-M63HB AL40	-
10	10	9.5	22	72	32	0.5	4	1	23000161	SCM-UC4-M100R05-M72HB AL40	-
						1	4	1	23000162	SCM-UC4-M100R10-M72HB AL40	-
						1.5	4	1	23000163	SCM-UC4-M100R15-M72HB AL40	-
						2	4	1	23000164	SCM-UC4-M100R20-M72HB AL40	-
12	12	11.5	26	83	38	0.5	4	1	23000165	SCM-UC4-M120R05-M83HB AL40	-
						1	4	1	23000166	SCM-UC4-M120R10-M83HB AL40	-
						1.5	4	1	23000167	SCM-UC4-M120R15-M83HB AL40	-
						2	4	1	23000168	SCM-UC4-M120R20-M83HB AL40	-
16	16	15.5	32	92	44	1	4	1	23000169	SCM-UC4-M160R10-M92HB AL40	-
						1.5	4	1	23000170	SCM-UC4-M160R15-M92HB AL40	-
						2	4	1	23000171	SCM-UC4-M160R20-M92HB AL40	-
20	20	19.5	38	104	54	1	4	1	23000172	SCM-UC4-M200R10-M104HB AL40	-
						2	4	1	23000173	SCM-UC4-M200R20-M104HB AL40	-

Recommended cutting speeds [m/min]


Material group			Specification/ example material	Suitability	Side milling $a_p = 1.5 \times DC$; $a_e = 0.05 \times DC$						
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]					
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	200	0.035	0.04	0.055	0.065	0.08	0.1
			500 to 700 N/mm ²	●	160	0.035	0.04	0.055	0.065	0.08	0.1
			700 to 1,000 N/mm ²	●	120	0.035	0.04	0.055	0.065	0.08	0.1
			1,000 to 1,400 N/mm ²	●	100	0.025	0.03	0.04	0.05	0.065	0.08
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	100	0.025	0.025	0.04	0.05	0.065	0.08
		Austenitic	e.g. 1.4301, 1.4571	●	80	0.025	0.03	0.04	0.05	0.065	0.08
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	65	0.02	0.025	0.03	0.04	0.05	0.065
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	170	0.03	0.04	0.055	0.065	0.08	0.1
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	140	0.03	0.04	0.055	0.065	0.08	0.1
N	Non-ferrous metals	Aluminium	Al up to 10% Si								
			Al > 10% Si	○	300	0.03	0.04	0.055	0.065	0.08	0.1
		Copper, brass, bronze and red brass		○	340	0.03	0.04	0.055	0.065	0.08	0.1
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	●	40	0.02	0.025	0.03	0.035	0.045	0.065
		Pure titanium		●	80	0.02	0.025	0.03	0.035	0.045	0.065
		Titanium alloys		●	70	0.02	0.025	0.03	0.035	0.045	0.065
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	60	0.025	0.03	0.03	0.035	0.045	0.065
			up to 58 HRC								
			> 58 HRC								
O	Other	Thermoplastics		○	300	0.03	0.04	0.055	0.065	0.08	0.1
		Duroplastics									
		GRP/CRP reinforced plastics, graphite									

● = highly suitable ○ = suitable

Universal solid tungsten carbide end mills

Universal end mill with six/eight blades UC6/8

PFERD

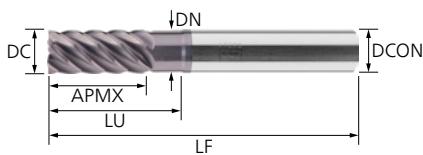

Sharp corner design

End mills for finishing and for trimming of workpiece contours. The low tool deflection allows very precise working. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.



Special features:

- High surface quality.
- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.



DC [mm]	DCON [mm]	APMX [mm]	LF [mm]	ZEFP		Item no.	Designation	Price/unit EUR
Long HA								
6	6	13	57	6	1	23000174	SCM-UC6-M060S-M57HA AL40	-
8	8	19	63	6	1	23000175	SCM-UC6-M080S-M63HA AL40	-
10	10	22	72	6	1	23000176	SCM-UC6-M100S-M72HA AL40	-
12	12	26	83	6	1	23000177	SCM-UC6-M120S-M83HA AL40	-
16	16	32	92	6	1	23000178	SCM-UC6-M160S-S92HA AL40	-
20	20	38	104	8	1	23000179	SCM-UC8-M200S-S104HA AL40	-


Recommended cutting speeds [m/min]

Material group			Specification/ example material	Suitability	Chamfering/deburring $a_p = 0.2 \times DC; a_e = 0.1 \times DC$				
					Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]			
						6	8	10	12
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	180	0.045	0.065	0.085	0.14
			500 to 700 N/mm ²	●	160	0.045	0.065	0.085	0.14
			700 to 1,000 N/mm ²	●	140	0.025	0.04	0.045	0.075
			1,000 to 1,400 N/mm ²	●	120	0.025	0.04	0.045	0.075
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	100	0.025	0.04	0.045	0.075
		Austenitic	e.g. 1.4301, 1.4571	●	75	0.025	0.04	0.045	0.075
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	●	60	0.025	0.04	0.045	0.075
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	180	0.045	0.065	0.085	0.14
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	140	0.025	0.04	0.045	0.075
N	Non-ferrous metals	Aluminium	Al up to 10% Si	●	300	0.045	0.065	0.085	0.14
			Al > 10% Si	●	260	0.045	0.065	0.085	0.14
		Copper, brass, bronze and red brass		●	300	0.045	0.065	0.085	0.14
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co	○	50	0.025	0.04	0.045	0.075
		Pure titanium		○	140	0.025	0.04	0.045	0.075
		Titanium alloys		○	70	0.025	0.04	0.045	0.075
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	○	70	0.025	0.04	0.045	0.075
			up to 58 HRC						
			> 58 HRC						
O	Other	Thermoplastics		○	300	0.045	0.065	0.085	0.14
		Duroplastics							
		GRP/CRP reinforced plastics, graphite							

● = highly suitable ○ = suitable


Universal solid tungsten carbide end mills

Universal deburring end mill UD

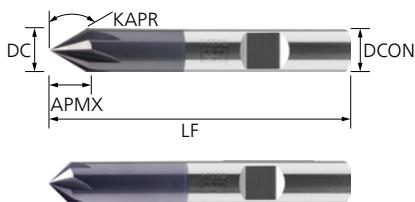

Conical shape

End mills for deburring and chamfering. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.

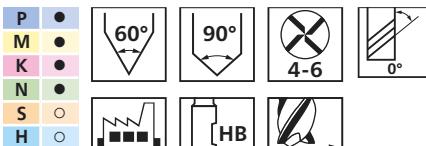

Special features:

- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.



DC [mm]	DCON [mm]	APMX [mm]	LF [mm]	KAPR	ZEFP		Item no.	Designation	Price/ unit EUR
60° HB HB									
6	6	5.2	57	60	4	1	23000116	SCM-UD4-M060A60°-HB AL40	-
8	8	6.9	63	60	5	1	23000117	SCM-UD5-M080A60°-HB AL40	-
10	10	8.7	72	60	6	1	23000118	SCM-UD6-M100A60°-HB AL40	-
12	12	10.4	83	60	6	1	23000119	SCM-UD6-M120A60°-HB AL40	-
90° HB HB									
6	6	3	57	45	4	1	23000120	SCM-UD4-M060A90°-HB AL40	-
8	8	4	63	45	5	1	23000121	SCM-UD5-M080A90°-HB AL40	-
10	10	5	72	45	6	1	23000122	SCM-UD6-M100A90°-HB AL40	-
12	12	6	83	45	6	1	23000123	SCM-UD6-M120A90°-HB AL40	-

Recommended cutting speeds [m/min]

Material group			Specification/ example ma- terial	Suitability	Profile milling – use of tip 											
					a_p	a_e	Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]								
								3	4	5	6	8	10	12	16	
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	up to 0.1 x D	up to 0.3 x D	900	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
			500 to 700 N/mm ²	●	up to 0.1 x D	up to 0.3 x D	700	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
			700 to 1,000 N/mm ²	●	up to 0.1 x D	up to 0.3 x D	550	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
			1,000 to 1,400 N/mm ²	●	up to 0.06 x D	up to 0.3 x D	400	0.015	0.025	0.03	0.04	0.045	0.055	0.065	0.08	
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	up to 0.06 x D	up to 0.3 x D	180	0.015	0.025	0.03	0.04	0.045	0.055	0.065	0.08	
		Austenitic	e.g. 1.4301, 1.4571	●	up to 0.06 x D	up to 0.3 x D	130	0.015	0.025	0.03	0.04	0.045	0.055	0.065	0.08	
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	up to 0.06 x D	up to 0.3 x D	100	0.01	0.018	0.02	0.03	0.04	0.05	0.06	0.07	
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	up to 0.1 x D	up to 0.3 x D	800	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	up to 0.1 x D	up to 0.3 x D	750	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	up to 0.1 x D	up to 0.3 x D	1,200	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
			Al > 10% Si	●	up to 0.1 x D	up to 0.3 x D	850	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
		Copper, brass, bronze and red brass		●	up to 0.1 x D	up to 0.3 x D	1,100	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co													
		Pure titanium														
		Titanium alloys														
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	●	up to 0.06 x D	up to 0.3 x D	200	0.01	0.018	0.02	0.03	0.04	0.05	0.06	0.07	
			up to 58 HRC	○	up to 0.06 x D	up to 0.3 x D	150	0.01	0.018	0.02	0.03	0.04	0.05	0.06	0.07	
			> 58 HRC													
O	Other	Thermoplastics		○	up to 0.1 x D	up to 0.3 x D	1,200	0.025	0.04	0.055	0.065	0.075	0.08	0.09	0.12	
		Duroplastics														
		GRP/CRP reinforced plastics, graphite														

● = highly suitable ○ = suitable

Cutting tools for stationary applications

Universal full radius end mill UB



Recommended cutting speeds [m/min]


Material group			Specification/ example material	Suitability	Profile milling – use of shoulder 											
					a_p	a_e	Cutting speed v_c [m/min]	Tooth feed f_z [mm/tooth] for cutting diameter DC [mm]								
								3	4	5	6	8	10	12	16	
P	Steel	All types of steel and cast steel up to 1,400 N/mm ²	up to 500 N/mm ²	●	up to 0.1 x D	up to 0.45 x D	570	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
			500 to 700 N/mm ²	●	up to 0.1 x D	up to 0.45 x D	450	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
			700 to 1,000 N/mm ²	●	up to 0.1 x D	up to 0.45 x D	350	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
			1,000 to 1,400 N/mm ²	●	up to 0.1 x D	up to 0.45 x D	250	0.02	0.04	0.05	0.06	0.07	0.08	0.1	0.12	
M	Stainless steel	Ferritic and martensitic	e.g. 1.4105, 1.4122	●	up to 0.1 x D	up to 0.45 x D	130	0.02	0.04	0.05	0.06	0.07	0.08	0.1	0.12	
		Austenitic	e.g. 1.4301, 1.4571	●	up to 0.1 x D	up to 0.45 x D	80	0.02	0.04	0.05	0.06	0.07	0.08	0.1	0.12	
		High-temperature-resistant and ferritic-austenitic (duplex)	e.g. 1.4362, 1.4462	○	up to 0.1 x D	up to 0.45 x D	60	0.015	0.03	0.04	0.05	0.06	0.07	0.08	0.1	
K	Cast iron	Cast iron with flake graphite (GJL, GG, grey cast iron)	up to 180 HB	●	up to 0.1 x D	up to 0.45 x D	550	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
		Cast iron with nodular graphite (GJS, GGG)	160 to 260 HB	●	up to 0.1 x D	up to 0.45 x D	500	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
N	Non-ferrous metals	Aluminium	Al up to 10% Si	○	up to 0.1 x D	up to 0.45 x D	750	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
			Al > 10% Si	●	up to 0.1 x D	up to 0.45 x D	600	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
		Copper, brass, bronze and red brass		●	up to 0.1 x D	up to 0.45 x D	700	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
S	Super and titanium alloys	Heat-resistant super alloys	Based on Fe, Ni and Co													
		Pure titanium														
		Titanium alloys														
H	Hard steels and chilled castings	Heat-treated and hardened steels	up to 50 HRC	●	up to 0.1 x D	up to 0.45 x D	150	0.02	0.04	0.05	0.06	0.07	0.08	0.1	0.12	
			up to 58 HRC	○	up to 0.1 x D	up to 0.45 x D	110	0.02	0.04	0.05	0.06	0.07	0.08	0.1	0.12	
			> 58 HRC													
O	Other	Thermoplastics		○	up to 0.1 x D	up to 0.45 x D	750	0.04	0.06	0.08	0.1	0.11	0.12	0.14	0.18	
		Duroplastics														
		GRP/CRP reinforced plastics, graphite														

● = highly suitable ○ = suitable




Full radius

End mills for free-form profile cutting. The solid tungsten carbide end mills are suitable for universal use on a variety of materials.

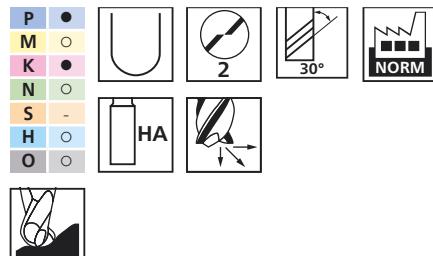

Special features:

- High productivity due to optimum stock removal rate.
- Long tool life due to modern tool coating.

D _c [mm]	DCON [mm]	APMX [mm]	LF [mm]	RE [mm]	ZEFP		Item no.	Designation	Price/ unit EUR
Long HA  HA									
3	6	5	54	1.5	2	1	23000100	SCM-UB2-M030R-S54HA6 AL40	-
4	6	8	54	2	2	1	23000101	SCM-UB2-M040R-S54HA6 AL40	-
5	6	9	54	2.5	2	1	23000102	SCM-UB2-M050R-S54HA6 AL40	-
6	6	10	54	3	2	1	23000103	SCM-UB2-M060R-S54HA AL40	-
8	8	12	58	4	2	1	23000104	SCM-UB2-M080R-S58HA AL40	-
10	10	14	66	5	2	1	23000105	SCM-UB2-M100R-S66HA AL40	-
12	12	16	73	6	2	1	23000106	SCM-UB2-M120R-S73HA AL40	-
16	16	22	82	8	2	1	23000107	SCM-UB2-M160R-S82HA AL40	-
Extra long HA  HA									
3	6	5	80	1.5	2	1	23000108	SCM-UB2-M030R-S80HA6 AL40	-
4	6	8	80	2	2	1	23000109	SCM-UB2-M040R-S80HA6 AL40	-
5	6	9	100	2.5	2	1	23000110	SCM-UB2-M050R-S100HA6 AL40	-
6	6	10	100	3	2	1	23000111	SCM-UB2-M060R-S100HA AL40	-
8	8	12	100	4	2	1	23000112	SCM-UB2-M080R-S100HA AL40	-
10	10	14	100	5	2	1	23000113	SCM-UB2-M100R-S100HA AL40	-
12	12	16	100	6	2	1	23000114	SCM-UB2-M120R-S100HA AL40	-
16	16	22	150	8	2	1	23000115	SCM-UB2-M160R-S150HA AL40	-





New additions to the PFERD product range

Stay up to date and discover our new products digitally and online. Our new products have **blue** item numbers in the Tool Manual.

